

# EUROPEAN PALLET

4 ft 3.18 in. × 3 ft 11.24 in.



## DESCRIPTION

The material of the pallet is FDA-approved Virgin HDPE through a rotational molding process which gathers the resistance to absorb high impacts and avoid deformations.

- It has UV protection which guarantees less wear and tear.
- It has resistance to weather conditions.
- One piece.
- Entrance for pallet jack or forklift.
- Stackable.
- The storage of flammable liquids is **not** allowed.
- High resistance to acids, bleaches, oils, and other hazardous substances.
- Light and easy to handle.

## FUNCTIONALITY

This pallet is perfect for industries, storage centers, warehouses, etc.

- Ideal for the stowage of 4 drums of 200 L (52.8 US gal) or containers that drain oily liquids.
- Widely used in the chemical, food, steel, and automotive industries.
- The load must be evenly distributed and on a flat surface. Don't stack pallets over pallets when they are loaded.

### ACCESS FOR PALLET JACK OR FORKLIFT


<b>A</b>	Pallet corners
<b>B</b>	Inlet for pallet jack forks or forklift
<b>C</b>	Opening for pallet jack forks or forklift
<b>D</b>	Width of the pallet jack forks or forklift
<b>E</b>	Pallet length or width
<b>F</b>	Height access for pallet jack or forklift

<b>D</b>				
25.50 in.				
12.59 in.	9.75 in.	6 in.	9.75 in.	12.59 in.
<b>A</b>	<b>B</b>	<b>C</b>	<b>B</b>	<b>A</b>
Pallet length 4 ft 3.18 "E"			<b>F</b> =3.9 in.	

<b>D</b>				
23.63 in.				
9.63 in.	8.89 in.	5.85 in.	8.89 in.	9.63 in.
<b>A</b>	<b>B</b>	<b>C</b>	<b>B</b>	<b>A</b>
Pallet width 3 ft 11.24 in. "E"			<b>F</b> =3.9 in.	

### Measures

Body	4 ft 3.18 in. × 3 ft 11.24 in. × 5.65 in.		
Weight	39.6 lbs. approximately 1%		
Storage capacity	1.43 US ton on the floor 1.1 US ton in forklift or pallet jack 1320 lbs. in racks		
Stowage capacity	13 pieces Stackable		
<b>Material</b>			
FDA-approved 100% Non-toxic Virgin HDPE			
<b>Temperature</b>	<b>Compression</b>	<b>Pressure</b>	<b>Impact</b>
23°F + 140°F	1980 lbs.	310 kg/cm <sup>2</sup>	10 kg-cm/cm

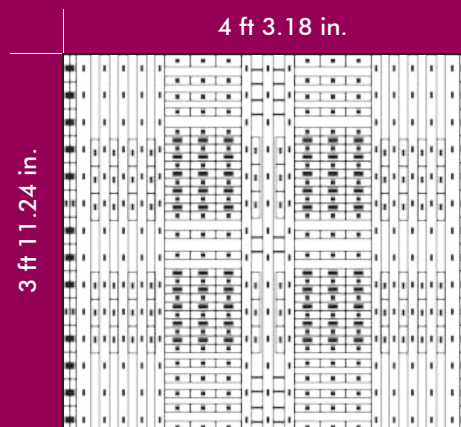

Dimensions and other measurements are nominal and may vary by ± 2%



SUITABLE FOR INDUSTRIAL SETTINGS

