


Tactile paving for blind persons

Code: LPT-01, LPT-04

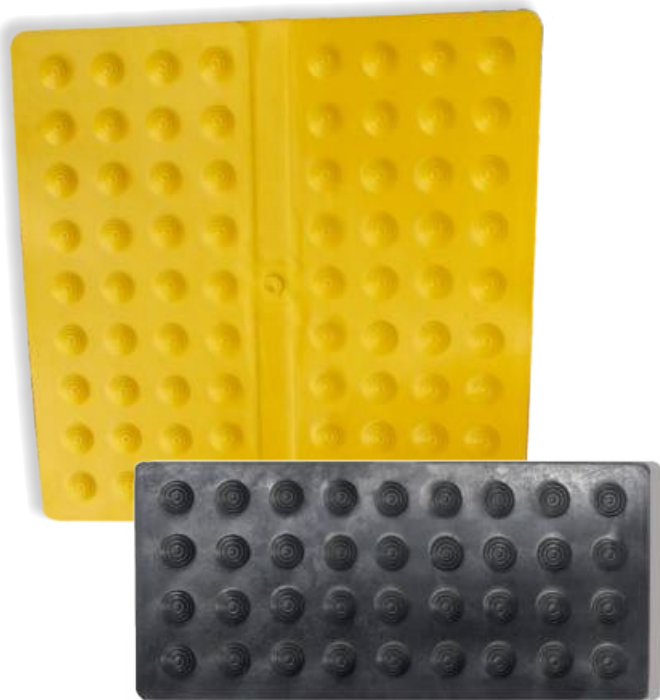

Images are merely illustrative models.

WHAT IS A TACTILE PAVING FOR BLINDS?

Quadrangular tactile paving to install on floors to favour blind and visual impaired persons mobility.

There are two different tile relief textures recognizable for those persons with an universal education on this code: strips to advance and points to indicate stop or warning.

Podotactile guide tile: works to create a safety way.

Warning podotactile tile: works as a warning message, for put in alert, make a stop or take caution.

Its use is recommended in hospitals, schools, crossings and any place where is necessary to guide blind people.

FEATURES

- Its main objective is to prevent potential dangers, warn on the knowed risks, and give a trusty guide for blinded people.
- Warn over the basic risks implies in crossing streets, get a bus, to get into a shopping mall, parking lot or climb thru unknowed stairs or ramps.
- Two differen textures guide blind pedestrians:
- **Podotactile guide:** gives direction and advance.
- **Warning tactile-pavement:** indicates a stop warning signal for a potential risk.
- Tactile anti-sliper bezel, Has a thickness from 0.15 to 0.23 in.
- Manufactured out in PVC.
- Black color, environment changes resistant and also with UV ray integrated protection.
- The tile can't create any inconvenience to conventional pedestrian.
- Easy installing on any plane surface just mix the components and follow the procedure.



TEXTURE DETAILS



Tactile paving for blind persons

Code: LPT-01, LPT-04

MEASURE

Total	LPT-01: 15.94 in.x 15.94 in.
	LPT-04: 15.94 in. x 7.48 in.
Reflective:	None
Body Color:	Yellow

installation procedure

Easy installation.


Verify that planned place for install is clean and free of dust, solvents or dirt.

Prepare the mix of adhesive formula: (33,81 us oz. /1000 ml) of the A component with (3.81 us oz. / 100 ml) of catalyst (B component) and stir well.

Each tile requires about 3 spoons (50 ml) of the adhesive mix to maintain fixed to floor.

Use a ½" brush to distribute the mix along the tile reverse. Make a contact test: when the mix feels less sticky on fingers, then is ready. With the tile well cemented put it in the designed place and press lightly.

The adhesive lose its properties in a period of 24 hrs and the glue warranty expires. Castaway leftovers is one use product.

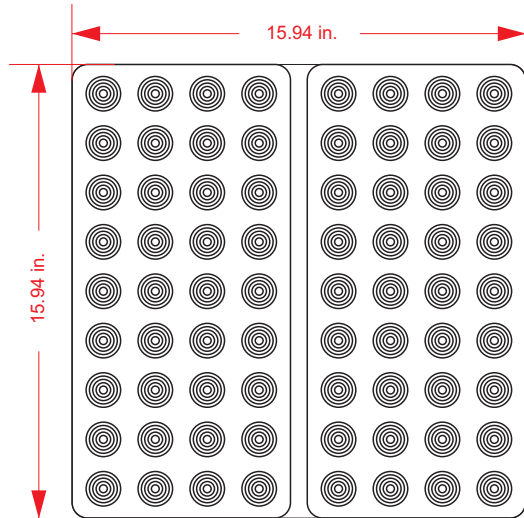

Images are merely illustrative models.

Measures are nominal and can vary, between +- 2%.

