

A leader doesn't follow steps  
... he marks the way



# I-CITY ROAD STUD

## I-CITY



### Features

- The ABS composition improves the resistance performance and expansion of the materials of the I-City Road Stud, even in extreme temperatures.
- The structural supports on the sides give higher resistance to compression and bending.
- It's a single piece, lightweight, and doesn't have sharp edges or borders.
- The side indentations facilitate their manual placing.
- It has 43 high-resistant and reflective glass beads embedded in plastic. It doesn't scratch, dull, or break.
- One or two ultra-reflective faces.
- It bears hits, bumps, friction, abrasion, and extreme weather.
- It has the option of adding a bolt according to your needs.
- The base design gives it higher adherence with bituminous marker adhesive or epoxy glue; this makes the contact surface surpass the minimum required by the ASTM standard.
- It's perfect for freeways and two-way streets.

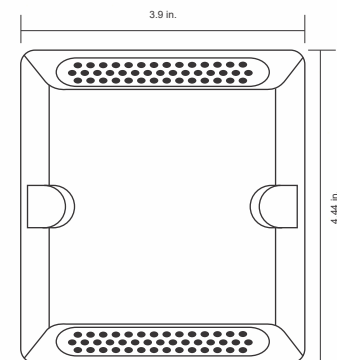

### Technical specifications

* Made of:	ABS plastic
* Measures:	Length: 3.9 in. Width: 4.44 in. Height: 0.78 in.
* Filler:	Molded in one piece.
* Color:	White and amber.
* Angle of inclination:	30°.
* Superficie reflejante por cara:	1.68 in <sup>2</sup> .
* Reflective:	43 reflective glass beads.
* Useful contact surface:	16 in <sup>2</sup> .
* Pressure resistance maximum load:	49,770 lb/in <sup>2</sup> .

Volumes, dimensions, and other measures are nominal and may vary by approximately 2%.X